

LEDDriving HLT BRIGHT H1

LEDDriving high and low beam lamps for truck




Cool white color temperature of 6,000 K

日光效果下视野更好



超高亮度

照射距离更远，驾驶人员可以反应更迅速。标志、障碍和危险可以很快被识别出来



LED replacement for conventional H1 high and low beam lamps

通过优化光分布减少眩光



H1 LED replacement for 24V

LEDDriving HLT BRIGHT replacement lamps offer a modern and intense light with a color temperature of up to 6,000 Kelvin. These replacement lamps are suitable for conventional H1 high and low beam lamps. LEDDriving HLT BRIGHT for high and low beam off-road applications are 24 V compatible and stand out with superior brightness, high compatibility, easier installation due to integrated driver and no radio disturbance. The pair of lamps comes with a 4-year OSRAM guarantee. For precise guarantee conditions please refer to www.osram.com/am-guarantee. These products do not have ECE approval and must not be used on public roads in any exterior application. Public roads use leads to cancellation of operating license and loss of insurance coverage. Several countries forbid sale and use of these products. Please contact your local distributor for further information.

产品数据表

技术参数

Product information

Order reference	64155DWBRT
Product type (off-road vs. on-road)	Off-road \pm H1
Application (Category and Product specific)	Mainly used for Low Beam, High Beam and Fog light applications


电参数

功率输入	13 W
标称电压	24.0 V
标称功率	13.00 W
输入功率容许偏差	± 20 %
测试电压	28.0 V

光度数据

光通量	1500 lm
光通量容许偏差	± 20 %
色温	6000 K
LED 光色	Cool white

尺寸和重量

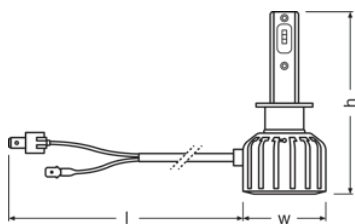

长度	76.2 mm
直径	11.8 mm
产品重量	50.00 g

寿命

使用寿命 Tc	2000 h
Guarantee	4 年

产品数据表

更多的产品数据

灯头 (标准名称)	P14.5s
-----------	--------

功能

Technology	LED
------------	-----

特定分类

Order reference	64155DWBRT
-----------------	------------

Environmental information



Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	29-02-2024
Primary Article Identifier	4062172379755
Declaration No. in SCIP database	In work

物流数据

产品代码	产品描述	包装单位 (件/单位)	尺寸 (长 x 宽 x 高)	体积	毛重
4062172379755	LEDiving HLT BRIGHT \triangleq H1	纸盒 2	136 mm x 56 mm x 162 mm	1.23 dm ³	201.00 g
4062172379762	LEDiving HLT BRIGHT \triangleq H1	箱 8	240 mm x 148 mm x 182 mm	6.46 dm ³	930.00 g

这里所提到的产品编码代表最小订购数量。一个整件包装含有一个或多个单一产品。请您在下单时，按一个或多个整件数下单。

下载数据

文件	
	User instruction LEDiving HLT BRIGHT
	小册子 LEDiving Retrofits - Exchange overview (EN)

安全建议

Application advice:For more detailed application information and graphics please see product datasheet and user manual.

应用建议

产品数据表

更多详细应用信息和图形,请参阅产品数据表。

免责声明

更改恕不另行通知。遗漏错误不承担任何责任。总是确保使用最新的信息。

